



115 QUAD & 115 OG GUTTER

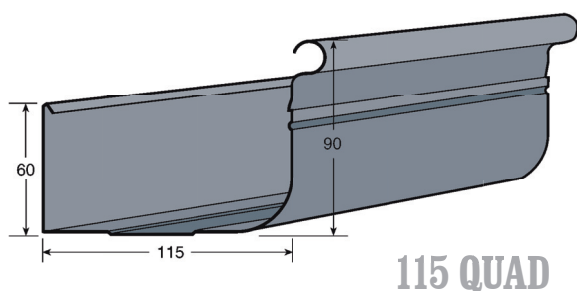

115 QUAD

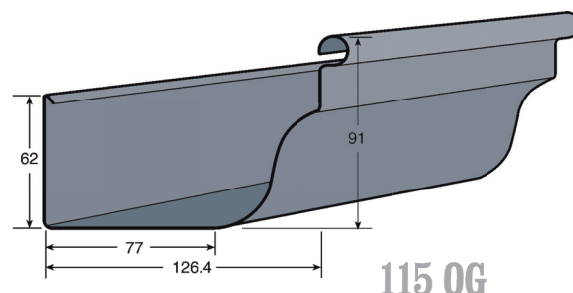

115 OG


115mm QUAD GUTTER FEATURES & BENEFITS

- Adaptable profile that blends perfectly with traditional and contemporary homes.
- Can be adapted to re-guttering.
- The high front is ideal for concealing sheet ends for a seamless finish.
- Base is designed to fit 75mm pops.
- Cross sectional area of **6,850mm²**.
- Available with optional slotting to allow overflowing during heavy rainfall.
- Available in ZINCALUME® steel, COLORBOND® steel & Heritage Galvanised Z600 to match or contrast your roof.
- Available in customised lengths to suit any project for fast and easy installation.
- The 115mm Quad Gutter is compatible with the 115mm General Purpose Bracket and the 115 Internal Straps, suspension Straps are required.
- Full range of accessories available including corners in matching COLORBOND® steel colours as well as stop ends, brackets and over straps.
- It is important that gutters slope towards the outlets (a minimum gutter fall of 1 in 500 is recommended). Without this slope, 'ponding' may occur, reducing the life of your gutter.


115mm OG GUTTER FEATURES & BENEFITS

- Traditional shape used on new homes with a modern hi-tensile finish.
- Can be adapted to re-guttering.
- Cross sectional area of **6,310mm²**.
- Base is designed to fit 75mm pops.
- The high front is ideal for concealing sheet ends for a seamless finish.
- Available with optional slotting to allow overflowing during heavy rainfall.
- Available in ZINCALUME® steel, COLORBOND® steel & Heritage Galvanised Z600 to match or contrast your roof.
- Available in customised lengths to suit any project for fast and easy installation.
- The 115mm OG Gutter is compatible with the 115mm General Purpose Bracket and the 115 Internal Straps, suspension Straps are required.
- Full range of accessories available including corners in matching COLORBOND® steel colours as well as stop ends, bracket and over straps.
- It is important that gutters slope towards outlets (a minimum gutter fall of 1 in 500 is recommended). Without this slope, 'ponding' may occur, reducing the life of your gutter.


ACCESSORIES



External Corner



Internal Corner




Stop Ends




Zincalume® Colorbond®

115 QUAD & 115 OG GUTTER


INSTALLATION OF THE 115 QUAD & 115 OG GUTTER

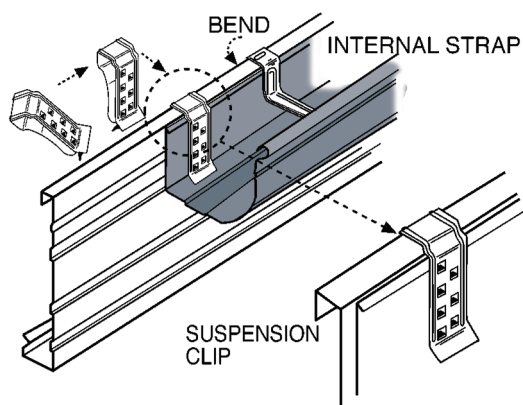


115 QUAD - STEEL FASCIA

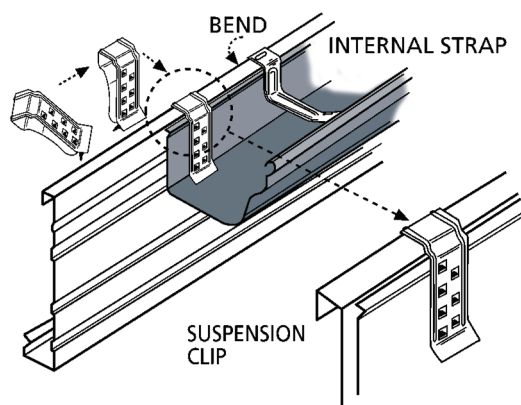

115 OG - STEEL FASCIA

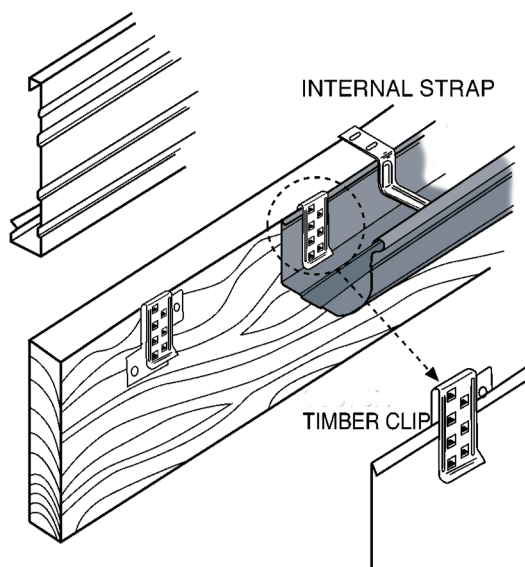

115 QUAD TIMBER OR STEEL FASCIA

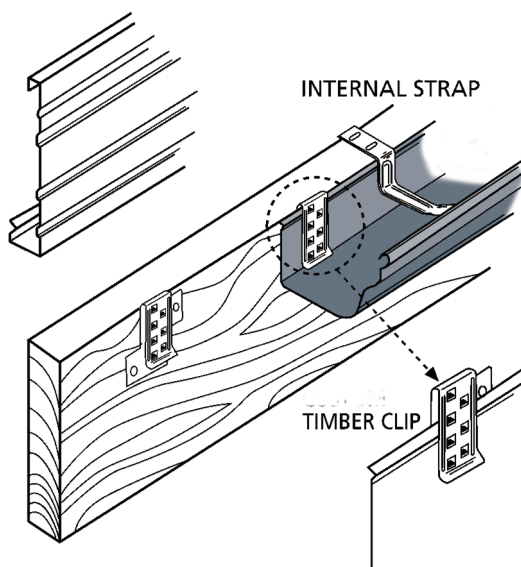

115 OG TIMBER OR STEEL FASCIA

For further information regarding the installation of our gutters please do not hesitate to contact your nearest Revolution Roofing office.