REVOLUTION EuroPlus SERIES

ORDER FORM

INTERLOCKING PANEL

CUSTOMER

Order no:	Date ordered:
Contact name and number:	Date required:
Delivery address:	
Project name:	

Materials (select one):

- ☐ NextSTAR 0.55 BMT
- ☐ NextSTAR Ultra 0.55 BMT
- ☐ NextREME XC (Aluminium + PVDF)
- ☐ NextREME SE (Aluminium + SMP)
- ☐ Nexteel Commercial Grade 0.8 BMT
- ☐ Metallic 0.55 BMT
- ☐ Matt Finish 0.55 BMT
- ☐ Heritage Galvanised
- ☐ RawSteel/Corten 0.7mm
- ☐ Copper 0.7mm

Colour:	Gauge:

Cover:

☐ 200mm ☐ 250mm ☐ 300mm

☐ Custom_____mm (Min 190mm Max 400mm)

Recess:

☐ 0mm ☐ 5mm ☐ 10mm ☐ 15mm

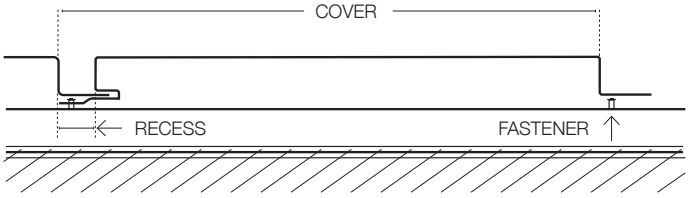

CUTTING LIST

Cover	Quantity	Length of Panel (mm)	Stop Ends Required ✓

- Maximum Length: 6m.
- Coil must be forward ordered: Lead times apply.

Oil Canning is an inherent characteristic of non-ferrous metals with broad flat areas. The Architect, Builder, and Homeowner needs to be aware that oil canning may affect the overall aesthetic outcome. There are measures that can be taken during design and installation to minimise the risk of oil canning such as ensuring the plywood is flush, the panels are fixed vertically, limiting the continuous length of each panel, and reducing the size of the pan. For more information please go to our website, www.revolutionroofing.com.au

revolutionroofing.com.au

Regency Park HQ
5-17 Taminga St
Regency Park
SA 5010
P 08 8352 0911

Plympton Sales & Display Centre
576 Marion Rd (cnr Bray St)
Plympton SA 5038
P 08 8352 0990

Southern Branch
14 Bredbo St
Lonsdale
SA 5160
P 08 8186 0545

Osborne Park
55b Hector St
Osborne Park
WA 6017
P 08 9217 9011

NEXTEEL

Revolution Roofing
STEEL YOURSELF