




CUSTOMER

Order no:	Date ordered:		
Contact name and number:	Date required:		
Delivery address:			
Project name:			
Materials (select one):			
<input type="checkbox"/> NextSTAR 0.55 BMT	<input type="checkbox"/> Metallic 0.55 BMT		
<input type="checkbox"/> NextSTAR Ultra 0.55 BMT	<input type="checkbox"/> Matt Finish 0.55 BMT		
<input type="checkbox"/> NextREME XC (Aluminium + PVDF)	<input type="checkbox"/> Heritage Galvanised		
<input type="checkbox"/> NextREME SE (Aluminium + SMP)	<input type="checkbox"/> RawSteel/Corten 0.7mm		
<input type="checkbox"/> Nexteel Commercial Grade 0.8 BMT	<input type="checkbox"/> Copper 0.7mm		
Colour:	Gauge:		
Cover:			
<input type="checkbox"/> 200mm	<input type="checkbox"/> 250mm	<input type="checkbox"/> 300mm	
<input type="checkbox"/> Custom _____ mm (Min 190mm Max 400mm)			
Recess:			
<input type="checkbox"/> 0mm	<input type="checkbox"/> 5mm	<input type="checkbox"/> 10mm	<input type="checkbox"/> 15mm

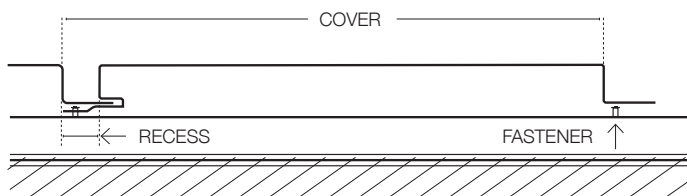

CUTTING LIST

[illegible]

- Maximum Length: 6m.
- Minimum Length: 0.4m.
- Coil must be forward ordered: Lead times apply.

Oil Canning is an inherent characteristic of non-ferrous metals with broad flat areas. The Architect, Builder, and Homeowner needs to be aware that oil canning may affect the overall aesthetic outcome. There are measures that can be taken during design and installation to minimise the risk of oil canning such as ensuring the plywood is flush, the panels are fixed vertically, limiting the continuous length of each panel, and reducing the size of the pan. For more information please go to our website, www.revolutionroofing.com.au

revolutionroofing.com.au

Regency Park HQ
5-17 Taminga St
Regency Park
SA 5010
P 08 8352 0911

**Plympton Sales &
Display Centre
576 Marion Rd (cnr Bray St)
Plympton SA 5038
P 08 8352 0990**

Southern Branch
14 Bredbo St
Lonsdale
SA 5160
P 08 8186 0545

Osborne Park
55b Hector St
Osborne Park
WA 6017
P 08 9217 9011

