


## Specification Snap Lock Panel

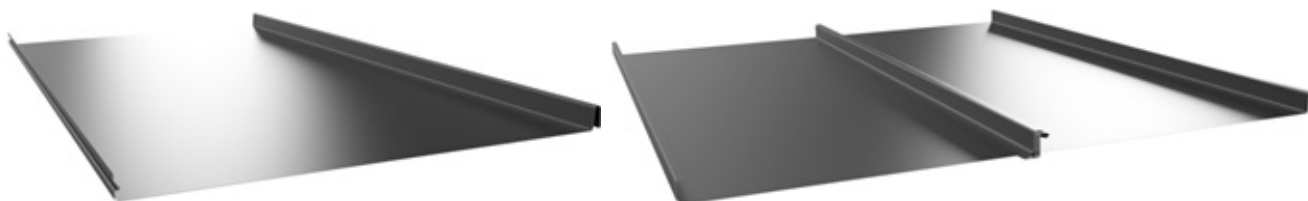

Design and installation to AS1562.1, pre painted and organic film/metal laminate products: to AS2728	
Profile	Concealed Fixed EuroPlus Snap Lock Panel fixed with concealed clips
Material	Choose from available finishes below
Gauge:	0.55mm
Finish:	Colour as per Colour Schedule
Fixing Method:	Concealed fix clips installed with two fasteners per clip
Fasteners:	Timber 10-12 x 25mm wafer head Type 17 self-drilling screws. Steel 10-24 x 22 Wafer Cross recess Teks (steel)
Roof Installer:	The roof sheeting and wall cladding shall be installed by an accredited Revolution Roofing Installer, in accordance with manufacturer specifications.
Rib Height:	25mm or 38mm
Cover Width Standard:	265mm or 350mm Cover Width Non-Standard: 185mm -- 465mm
Finishes available:	Heritage Galvanised Z600 G300 0.55 BMT Zincalume AM125 G300 0.55 BMT or 0.8 BMT Colorbond® AM100 G300 0.55 BMT or 0.8 BMT Colorbond® Matt Finish AM100 G300 0.55 BMT Colorbond® ULTRA AM150 G300 0.55 BMT Colorbond® METALLIC AM100 G300 0.55 BMT Copper 0.55 BMT or 0.7 BMT Corten 0.7 BMT Painted Aluminium 0.8 BMT PRINTECH Aluminium 0.8 BMT
Substructure Details:	Roof: When used as a roof sheet, there must be a 19mm plywood substrate. As with all Colorbond® onto plywood, a separation barrier must be used between the two, as well as a ventilation gap. This is required to stop condensation. Wall Cladding: When used as a wall cladding the profile can be installed on plywood or on battens with an Internal Span and End Span of no greater than 600mm.
Installation:	After the installation, on a suitably prepared substructure, and after fastening the metal sheet by means of concealed clips, the next sheet is put in place and the snap profile joint between the two plates is formed by the typical 'click'.

For more information please contact :

SA | Shawn Stevens 0428 137 398 | shawn.stevens@revroof.com.au

WA | Greg Harbour 0406 012 099 | greg.harbour@revroof.com.au

Nat | Eric Lien 0448 122 127 | eric.lien@revroof.com.au